



**bre**global

**Evaluation testing of  
National Cables Industry  
'NCI-FR' 2x1.5mm<sup>2</sup> cable  
to selected clauses of  
BS 7846:2009**

Prepared for:  
National Cables Industry  
Plot No. 06  
Al Sajja Industrial Area  
Al Dhaid Road  
Sharjah  
United Arab Emirates


3 March 2014

Test report number 272047-2



0578

Page 1 of 9

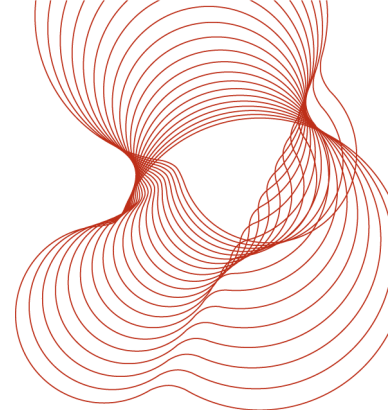

**Prepared on behalf of BRE Global by**

---

Name Ewan MacDonald

Position Consultant

Signature 

---

**Approved on behalf of BRE Global by**

---

Name Dave Hoare

Position Senior Consultant

Date 3 March 2014

Signature 

---

BRE Global  
Bucknalls Lane  
Watford  
Herts  
WD25 9XX  
T + 44 (0) 1923 664100  
F + 44 (0) 1923 664994  
E [enquiries@breglobal.com](mailto:enquiries@breglobal.com)  
[www.breglobal.com](http://www.breglobal.com)


BRE Global is not UKAS accredited to make opinions and interpretation. Any opinions and interpretations included as part of this report are clearly marked as such.



0578


This report may only be distributed in its entirety and in accordance with the terms and conditions of the contract. Test results relate only to the items tested. We have no responsibility for the design, materials, workmanship or performance of the product or items tested. This report does not constitute an approval, certification or endorsement of the product tested.

This report is made on behalf of BRE Global. By receiving the report and action on it, the client accepts that no individual is personally liable in contract, tort or breach of statutory duty (including negligence). No third party has any right to rely on this report.

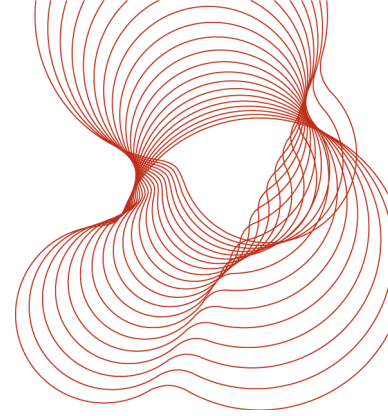

## Contents


1	Introduction	4
2	Details of sample received and tests carried out	5
3	Test results	6
3.1	BS 7846:2009 Clause 6.4 - Corrosive and acid gas emissions of insulation and tape(s)	6
3.2	BS 7846:2009 Clause 9.3 - Corrosive and acid gas emissions of bedding and tape(s)	6
3.3	BS 7846:2009 Clause 10.2 - Corrosive and acid gas emissions of armour tape	6
3.4	BS 7846:2009 Clause 11.4 - Corrosive and acid gas emissions of sheath	7
3.5	BS 7846:2009 Clause 17.2 - Flame propagation on a single cable	7
3.6	BS 7846:2009 Clause 17.3 - Smoke emission	7
3.7	BS 7846:2009 Clause 17.4.2 - Resistance to fire - Category F2	8
3.7.1	BS 6387:1994 Clause 11.1 (Annex D.1 & D.2) - Resistance to fire alone	8
3.7.2	BS 6387:1994 Clause 11.2 (Annex D.1 & D.3) - Resistance to fire with water	8
3.7.3	BS 6387:1994 Clause 11.3 (Annex D.1 & D.4) - Resistance to fire with mechanical shock	8
3.8	BS 7846:2009 Clause 18.5 - Flame propagation on multiple cables	8
4	Conclusion	9
5	Reference	9

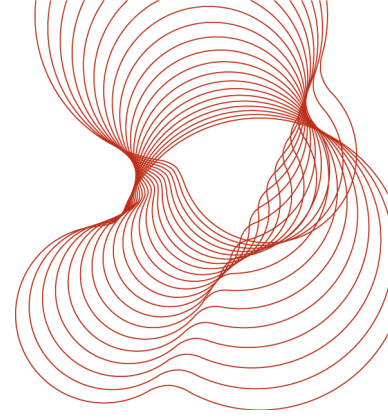

## **1 Introduction**

The requirement of the work was to determine the performance of a cable when tested to selected clauses of BS 7846:2009 [1].

The client for this work was National Cables Industry, Sharjah, United Arab Emirates. The requirement of the work is given in Quotation Q5342.

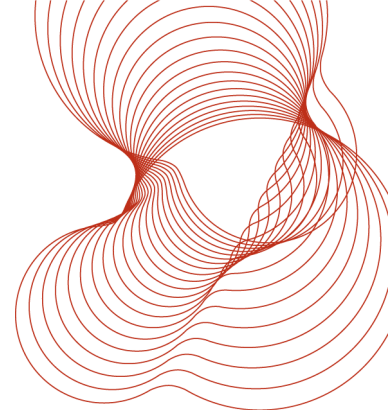

## 2 Details of sample received and tests carried out

The cable tested was a 14.4mm diameter, 2 core cable comprising:


- 2 off 1.5mm<sup>2</sup> insulated, stranded copper conductors with mica glass tape.
- Bedding
- Steel wire armour
- Armour tape
- Over sheath

The over sheath had two lines of the following embossed marking:

'ELECTRIC CABLE 600/1000V 2x1.5mm<sup>2</sup> CU/XLPE/SWA/LSZH BS 7846-F2 NATIONAL CABLES INDUSTRY UAE 2013 NCI-FR'.

The test specimen was supplied by the client and received on 19 August 2013. BRE Global was not involved in the sample selection process and therefore cannot comment upon the relationship between samples supplied for test and the product supplied to market.

The client requested that the cable was tested to selected clauses of BS 7846:2009 and this report should be read in conjunction with it.

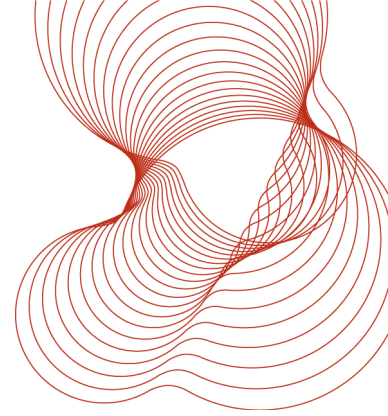

### 3 Test results

#### 3.1 BS 7846:2009 Clause 6.4 - Corrosive and acid gas emissions of insulation and tape(s)


Cable type	Component	% HCl per gram of sample	Result
2x1.5mm <sup>2</sup>	Mica tape	<0.1	Pass
2x1.5mm <sup>2</sup>	Insulation	<0.1	Pass

#### 3.2 BS 7846:2009 Clause 9.3 - Corrosive and acid gas emissions of bedding and tape(s)

Cable type	Component	% HCl per gram of sample	Result
2x1.5mm <sup>2</sup>	Bedding	<0.1	Pass

#### 3.3 BS 7846:2009 Clause 10.2 - Corrosive and acid gas emissions of armour tape

Cable type	Component	% HCl per gram of sample	Result
2x1.5mm <sup>2</sup>	Armour tape	<0.1	Pass

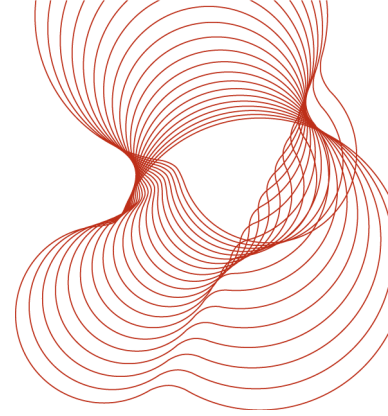

**3.4 BS 7846:2009 Clause 11.4 - Corrosive and acid gas emissions of sheath**


Cable type	Component	% HCl per gram of sample	Result
2x1.5mm <sup>2</sup>	Sheath	<0.1	Pass

**3.5 BS 7846:2009 Clause 17.2 - Flame propagation on a single cable**

Cable type	Cable diameter (mm)	Duration burner applied to cable (s)	Unaffected length of cable (mm)	Extent of charring (mm)	Result
2x1.5mm <sup>2</sup>	14.4	60	435	495	Pass

**3.6 BS 7846:2009 Clause 17.3 - Smoke emission**

Cable Type	Cable Diameter (mm)	No. of cable lengths	Minimum light transmittance (%)	Result
2x1.5mm <sup>2</sup>	14.4	3	89.4	Pass

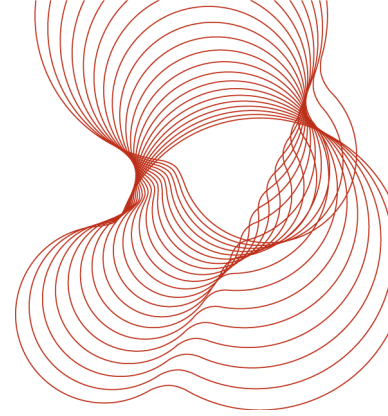

### 3.7 BS 7846:2009 Clause 17.4.2 - Resistance to fire - Category F2

BS 7846:2009 Clause 17.4.2 - Category F2 states that the cables shall be tested in accordance with BS 6387:1994, D.2 and shall withstand 950°C for 3 hours. Additionally, the cable shall be tested in accordance with BS 6387:1994, D.3 and D.4 and shall confirm to the requirements for Category W and Category Z.

#### 3.7.1 BS 6387:1994 Clause 11.1 (Annex D.1 & D.2) - Resistance to fire alone

Cable type	Test category	Test voltage (Uo/U)	Comment	Result
2x1.5mm <sup>2</sup>	C	600/1000V	No fuses ruptured or lamps extinguished	Pass

#### 3.7.2 BS 6387:1994 Clause 11.2 (Annex D.1 & D.3) - Resistance to fire with water

Cable type	Test category	Test voltage (Uo/U)	Comment	Result
2x1.5mm <sup>2</sup>	W	600/1000V	No fuses ruptured or lamps extinguished	Pass


#### 3.7.3 BS 6387:1994 Clause 11.3 (Annex D.1 & D.4) - Resistance to fire with mechanical shock

Cable type	Test category	Test voltage (Uo/U)	Comment	Result
2x1.5mm <sup>2</sup>	Z	600/1000V	No fuses ruptured or lamps extinguished	Pass

### 3.8 BS 7846:2009 Clause 18.5 - Flame propagation on multiple cables

Cable Type	Non-metallic volume per unit length (l/m)	Number of cable lengths in test array	Extent of char above burner (m)	Result
2x1.5mm <sup>2</sup>	0.1275	12	0.82	Pass



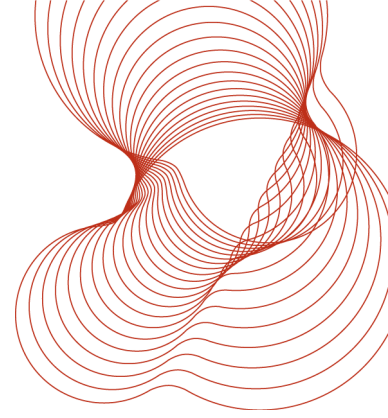

## 4 Conclusion

The National Cables Industry 'NCI-FR' 2x1.5mm<sup>2</sup> cable met the requirements of the selected clauses of BS 7846:2009.

## 5 Reference

1. BS 7846:2009. Electric cables – Thermosetting insulated, armoured fire-resistant cables of rated voltage 600/1000 V having low emission of smoke and corrosive gases when affected by fire - Specification. British Standards Institution, London 2009.

---

=====REPORT ENDS=====